

24V

3000A

GO batteries

GB251+



# COMMERCIAL-GRADE LITHIUM JUMP STARTER.™

32L+

### GAS AND DIESEL.

It's commercial in every way. It jump starts almost every type of vehicle and equipment, including semi-trucks (up to class 8), motorhomes, coaches, buses, mining, agricultural, construction, and vocational equipment - 6, 8, 12, and 16 cylinder - and more.



### 60-SECOND TIMER.

An automatic power conservation feature. Start vehicle within 60 seconds. After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.

2.0


### ULTRA SAFE 2.0.

Safe and easy to use battery jump starter pack without the worry of incorrect connections or sparks. Safely connect to any 24-volt battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

600 LUMENS

### MULTI-FUNCTIONAL.

It's not just a lithium jump starter but also a portable power bank for recharging smartphones, tablets, and other USB devices, with an ultra-bright 600-lumen LED flashlight with seven light modes, including emergency strobe and SOS.

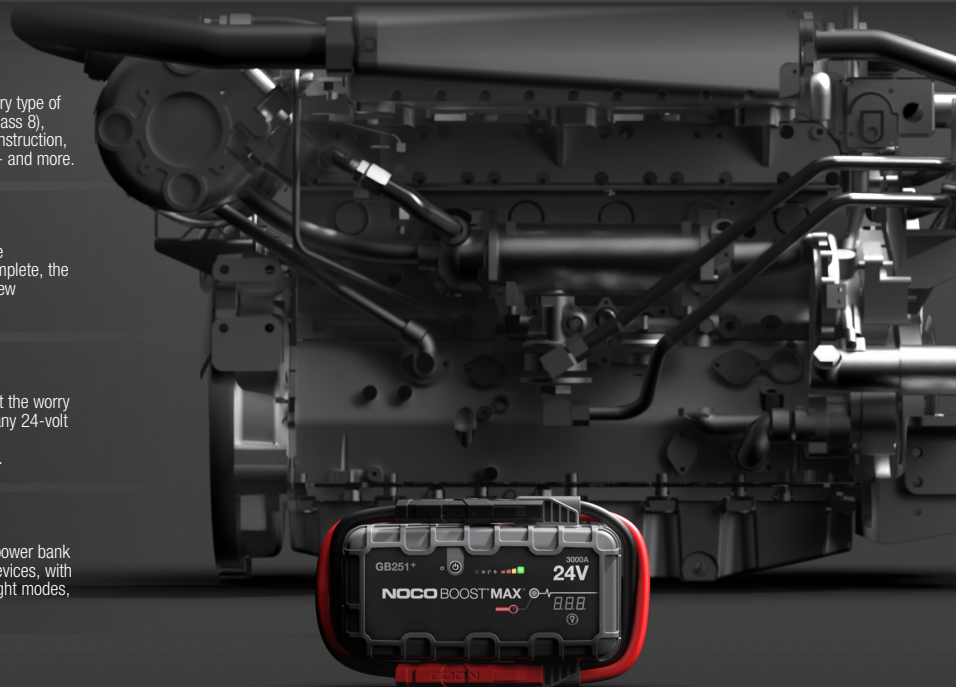

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

LEAD ACID

WET	GEL	MF	EFB	AGM
-----	-----	----	-----	-----

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



## INTERFACE

### POWER LED

The charger is in standby or the battery voltage is too low for the charger to detect.



### ERROR

Illuminates Red if reverse polarity is detected. Blinks "on" and "off" in various sequences (from 1 to 6 blinks) to convey error conditions.



### HOT/COLD INDICATOR

Illuminates solid or flashes blue when internal temperature is too low. Illuminates solid or flashes red when internal temperature is too high.



### CHARGE LED

Indicates the charge level of the internal battery.



### BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



### VOLTMETER

Built-in voltmeter displays the voltage of the vehicle's battery for enhanced diagnostics and troubleshooting.




## USB RECHARGE.

Charge virtually any USB device, including smartphones and tablets. Remote power for a wide range of 12V devices including tire pumps, inverters, lights, phone chargers and more.


## RECHARGE TIME: 8.5hr

From 0-100% 4X Faster. Charge directly from the vehicle's 12-volt auxiliary port or the XGC4 4-Amp Power Adapter to recharge it's 137 watt-hours lithium-ion battery in 8.5 hours.


## WHAT'S IN THE BOX

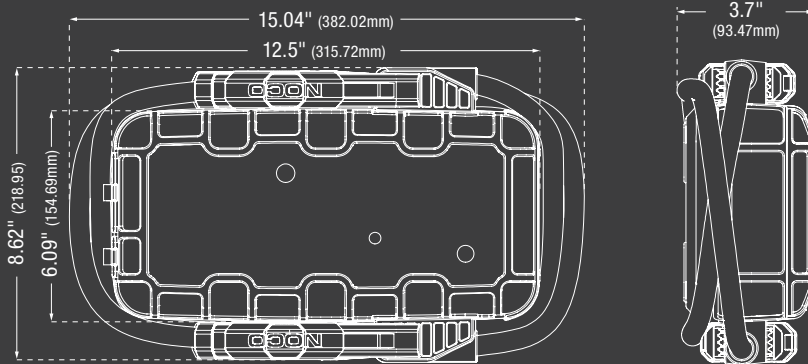


\*Accessories not to scale with GB251+




Type A - NA



Type C - EU




12V Cable




XGC-4 Adapter



User Guide



Type G - UK



Type I - AU



EVA Case

## TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	137 Wh Lithium Ion
PEAK CURRENT RATING:	3000A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
12V (INPUT):	12V/5A (14V Max)
12V (OUTPUT):	12V, 15A Max
USB (OUTPUT):	5V, 2.1A Max Each
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection
WEIGHT:	13.6 lbs (6.17kg)
VOLUMETRICS:	<p><b>Inner Carton:</b> Dimensions: 19.49" x 14.17" x 10.51" Weight: 21.83 lbs UPC: 0-46221-19041-0</p> <p><b>Master Carton:</b> Dimensions: N/A Weight: N/A Quantity: 1 UCC: 00046221190410</p> <p><b>Units Per Pallet:</b> 56 Units</p>

**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

