



POWERROAD



www.yucell.com


Specifications

YG7A-BS

Model NO .	YG7A-BS	
Same Dimensions As YUASA Model	YTX7A-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	7 AH	
Dimension	Length	150 mm (5.90 inches)
	Width	86 mm (3.38 inches)
	Height	94 mm (3.70 inches)
	Total Height	94 mm (3.70 inches)
Approx. Weight	Approx. 2.49kg (5.48Lbs)	
Charge Current (A)	0.7A	



Dimensions

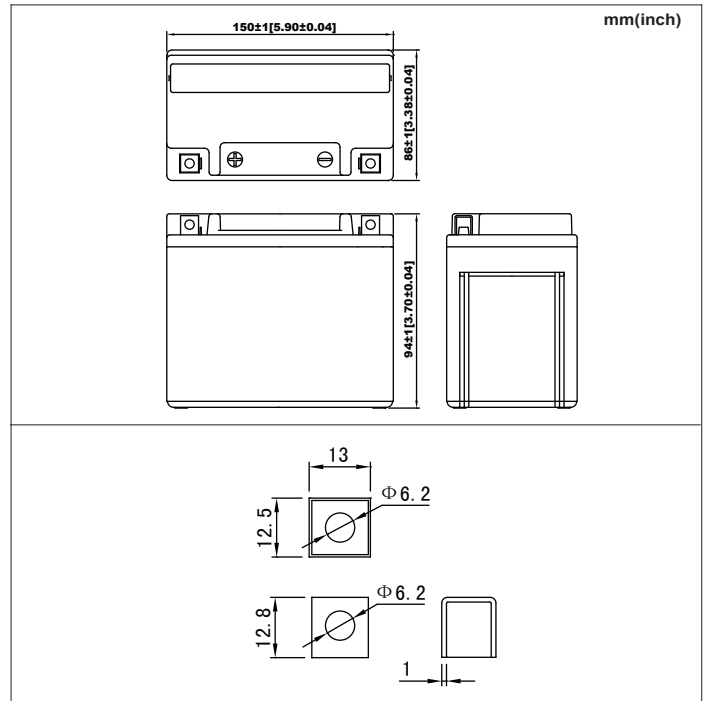

Characteristics

Capacity 25°C (77°F)	10hours rate (0.7 A to 10.5V)	7.0 Ah
	5hours rate (1.4 A to 10.2V)	5.9Ah
	1C (7.0A to 9.6V)	3.1 Ah
	3C (21A to 9.6V)	2.5 Ah
Cold Cranking Amperes(-18°C EN Standard)		235 A
Internal Resistance (at 1KHz)		Approx.7.5mΩ
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge	200 cycles
	80% depth of discharge	225 cycles
	50% depth of discharge	500 cycles
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

